





# 187377 BOWL VERDE-DK

12mm 42x42x15 cm./16.5x16.5x5.9in. • E75

Información Técnica / Technical Information		
Característica	Norma	Resultado
APTITUD PARA LA LIMPIEZA / APTITUDE FOR CLEANINGNESS	EN-14688	CUMPLE / PASSED
RESISTENCIA A LA CARGA / LOAD TEST	EN-14688	CUMPLE / PASSED
PROTECCIÓN CONTRA EL DESBORDAMIENTO / PROTECTION AGAINST OVERFLOW	EN-14688	CUMPLE / PASSED
DURABILIDAD /DURABILITY	EN-14688	CUMPLE / PASSED

# **WASHBASIN**

### INSTALLING THE WASHBASIN


## General

The washbasins sold by DUNE are decorative. The only fixing point required to secure the washbasin to the surface on which it rests is the drain valve.

The drain valve should not be overtightened when installing the washbasin. If it is too tight, it could lead to cracks appearing in the washbasin.

#### Glass

In the case of glass washbasins, you should not use adhesives or silicone to fix them to the base, as this may lead to the back guard breaking due to the adhesive shrinking, which would affect the finish on the visible side. DUNE will not accept any complaints about stains appearing near to the drainage area if adhesives have been used to fix the washbasin to its base.

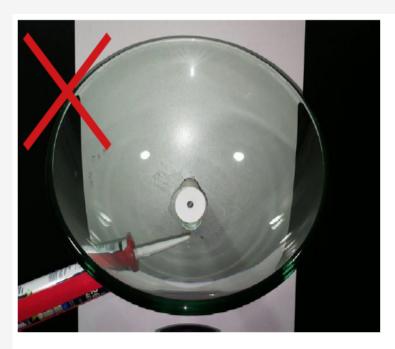







Glass washbasins should always be handled on a level surface, and avoid subjecting them to bumps and scratches, as breaking the washbasin's back guard would affect the finish on the visible side. DUNE will not accept any complaints about problems with the finish caused by improper handling of its washbasins.

### **Stone**

The shading of models made from stone may vary as they are manufactured using a natural product composed of veins of varying colours. This should be considered an inherent characteristic of the material which gives each washbasin a unique finish. DUNE will not accept any complaints about shading differences in stone washbasins.

### Cement

As they are highly rigid, cement washbasins may crack due to rough handling, bumps or high pressure in the installation of the drain valve. Handle these products with care.

### **CLEANING THE WASHBASIN**

It is recommended to use water, neutral soap and a soft cloth for daily cleaning. To prevent limescale stains, we recommend drying the washbasin after use.

### Ceramic

These should be cleaned regularly with suitable cleaning products and rinsed with water. Do not use abrasive products to clean them, to avoid scratching the surface of the washbasin.

Repeatedly pouring away high-temperature liquids leads to stresses in the material, which may result in cracks forming to relieve the stresses. To avoid this phenomenon, DUNE advises against pouring high-temperature liquids into the washbasin or to do so gradually.

### Stone

We recommend always using pH neutral cleaning products. Cleaning products with an acidic/basic pH may alter the colouring of the washbasin.

#### Metal

We recommend using soap and water or pH neutral products for cleaning. Do not use abrasive products to clean them, to avoid scratching the surface of the washbasin. Cleaning products with an acidic/basic pH may alter the colouring of the washbasin.

#### Cement

Do not pour products with a very high temperature into the washbasin, to prevent cracks from forming.

Repeatedly pouring away high-temperature liquids leads to stresses in the material, which may result in cracks forming to relieve the stresses. To avoid this phenomenon, DUNE advises against pouring high-temperature liquids into the washbasin or to do so


gradually.

### PVD (gold/silver finish)

We recommend using soap and water or pH neutral products for cleaning. Do not use abrasive products to clean them, to avoid scratching the surface of the washbasin. Cleaning products with an acidic/basic pH may alter the colouring of the washbasin.



INSTRUCCIONES DE MONTAJE / ASSEMBLY INSTRUCIONS 188623 Pedestal White 75×33×15 cm./29.5"×13"×6"



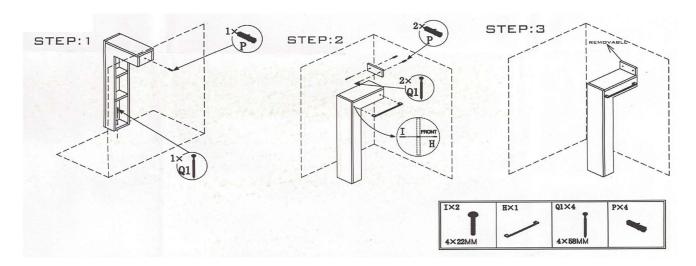


Tabla de adhesivos / Adhesives Table				
	Cemento cola C1	Cemento cola C2	Adhesivo epoxidico	
	C1 concrete glue	C2 concrete glue	Epozi adhesive	
KERAKOLL	ESPECIAL ECO	H 40 ECO FLEX	SUPERFLEX ECO	
MAPEI	TIXOBOND	KERAFLEX MAXI S-1	KERALASTIC T	

	Mortero adhesivo látex	
	Latex adhesive mortar	
LATICRETE	Mortar 211	
	+ Laticrete 4237	

Productos de tratamiento / Tratment products				
	Código	Descripción	Código PHP recomendado	
	Code	Description	Recommended retail price	
<b>CRISTAL</b> GLASS	185463	ANTIGLISS	D787	
PIEDRA	184507	CERA LIQUIDA PROTECTORA LIQUID PROTECTIVE WAX	D945	
STONE	184508	SELLADOR ANTIMANCHAS STAIN-PROF SEALER	D969	

Tabla de pastas de rejuntar / Grouting pastes table			
	Pasta de rejuntar cementosa Pasta de rejuntar e		
	Cement grouting material	Epoxy grouting material	
KERAKOLL	FUGABELLA ECO PORCELANA	FUGALITE	
MAPEI	KERACOLOR FF	KERAPOXY	
LATICRETE	LATICCRETE serie 1600	-	

